





Hanging sliding roller installation

Function	Door width	Door weight	Door thickness	Application	Installation
Non-soft	500±20mm	≤100kg	30~50mm	Aluminum frame door single & double	

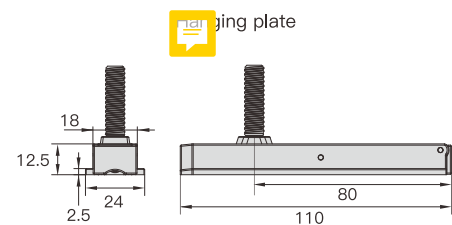


Product name	Hanging plate	Roller	Stopper	Bottom guide	Anti-slip off part
Accessories					
Qty	2	2	2	1	2


1 Calculate and door size

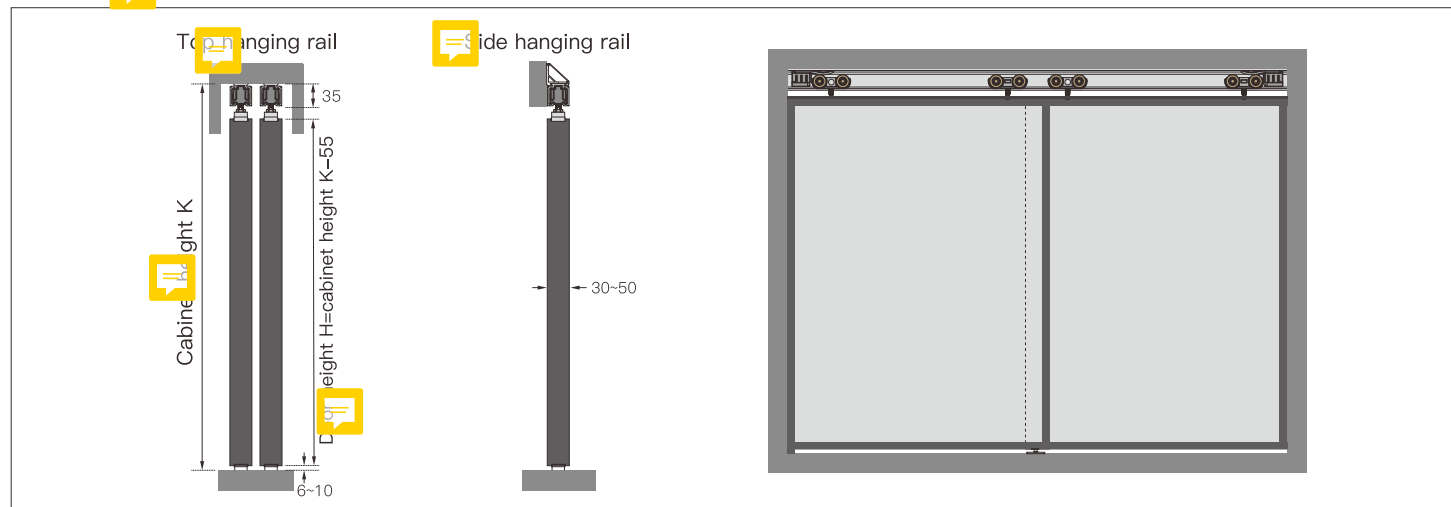

2 Installation requirements

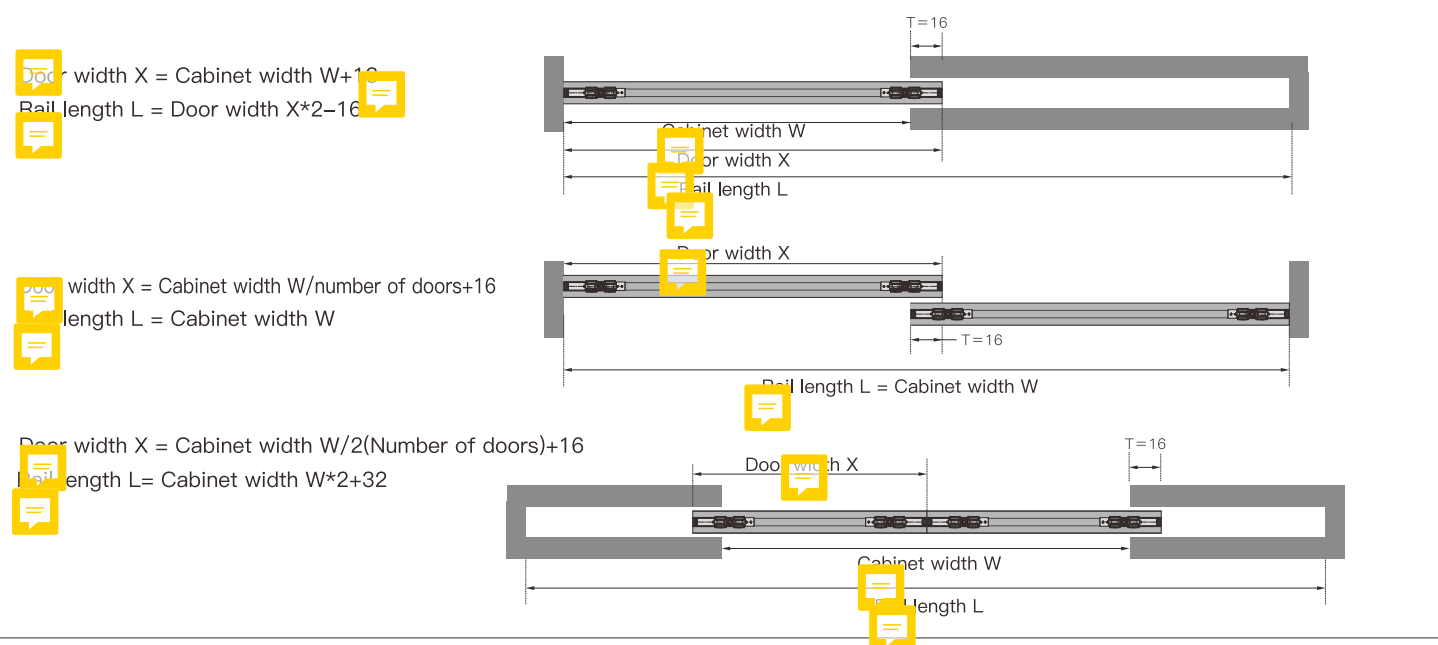


3 Aluminum frame door

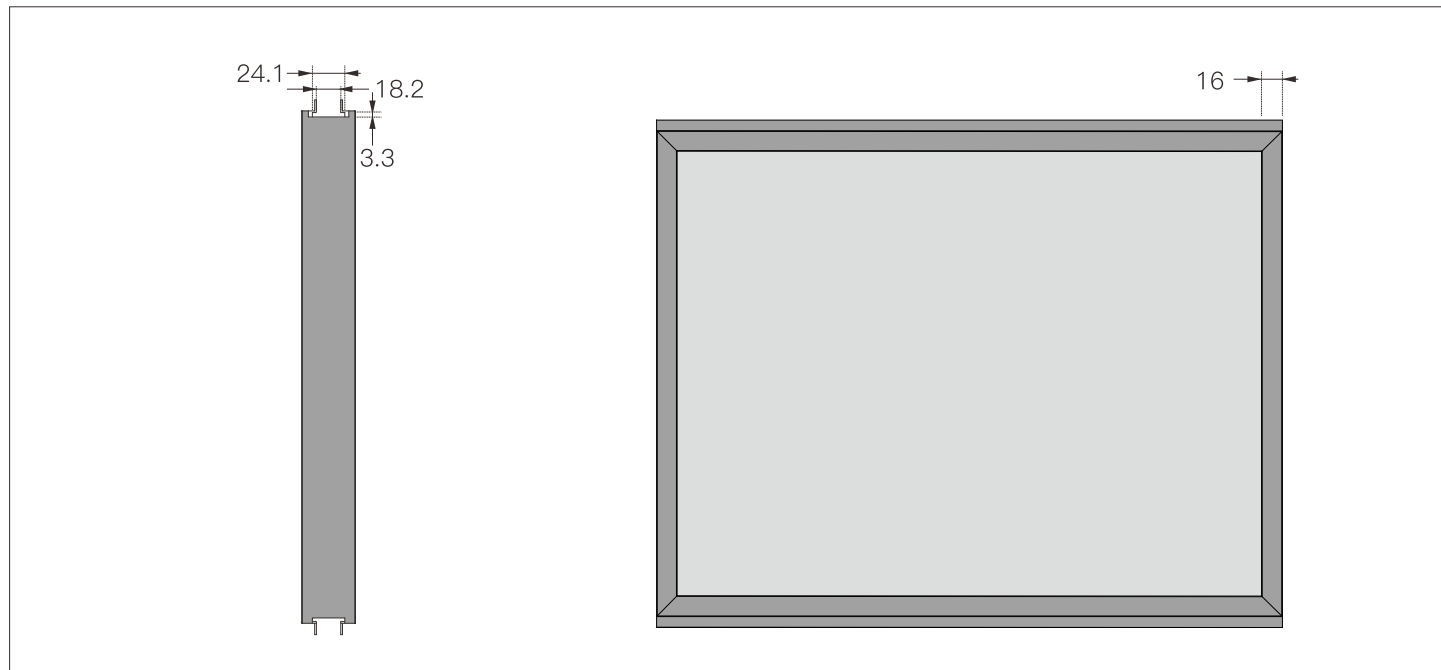

4

Upper components and runners install into the rail


Stopper on both side of rail, rollers at the middle of rail.
Ensure rail is clean and without impurity

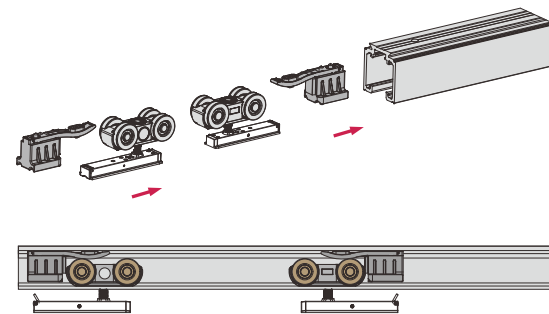

5

Install anti-slip accessories

Install and fix anti-slip accessories on upper profile according to drawing size

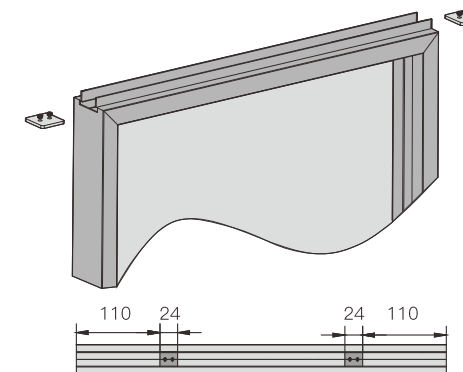

6

Door installation and adjustment

Raise up the door to put the rollers in after fixed upper rail and fasten with screws. put the door to one side, ensure the bottom guide position and fix it. Put the door upon the bottom guide meanwhile, adjust door with spanner to finish installation

